

# Proven technology with large capacity

## Master of performance



# MASTER plus

## MASTER plus



**Tank size:** 800, 1000, 1200, 1500 and 1800 l  
**Controller:** HC 5500, HC 6500, HC 8500 or HC 9500  
**TurboFiller:** High capacity, easy to operate  
**Liquid system:** Simple to operate with many features

**Chassis:** High tensile steel chassis  
**PRO booms:** Compact, vertically folded booms from 12 to 28 m  
**TWIN STREAM:** Air assistant 12 and 15 m



## Simple, robust and easy to use

All key functions on the MASTER plus are unsurpassed. The integrated Quick Hitch, the well arranged MANIFOLD fluid system and the versatile boom range are some of the key features making handling a pleasure and spraying efficient.

The large range of high quality features makes the MASTER plus a perfect choice for the demands of the modern farmers.



### TurboFiller

TurboFiller is a high capacity induction hopper which makes the filling of chemicals fast and easy. The unique TurboDeflector creates a powerful liquid circulation in the hopper and mixes all types of chemicals quickly and safely.

The cleaning of containers and the TurboFiller itself is managed by a rotating nozzle. A multifunctional 3-valve operating unit and a cleaning pipe make the chemical filling easy and efficient.

## Concept

Demands for simple and reliable solutions, serviceability and capacity are universal worldwide. The MASTER plus is designed so that the weight is close to the tractor, and the centre of gravity is low.

The pump is mounted on the rear frame of the chassis, providing easy service access, and the PTO is not widely angled when the sprayer is lifted up.



### HC 8500 and HC 9500

“Touch the future” with integrated electronics. The HC 8500 and HC 9500 controllers provide growers with a powerful, full featured precision farming tool. AutoSectionControl, guidance and data logging are standard features of the ISOBUS terminals.



### DilutionKit

On the MASTER Plus you now have the option of adding the HARDI DilutionKit to have the possibility to flush and rinse the boom and tank.



## MANIFOLD SYSTEM

### Easy to operate

All primary functions of operation are built into a centrally located manifold system. The colour-coded valves and icons are easy to understand.

The MANIFOLD valves operate all the fluid system functions on the sprayer; easily reached and logically incorporated into the MASTER design.

- 1 Pressure manifold valve - tank rinsing / extra agitation
- 2 Pressure manifold valve - spraying / chemical filling
- 3 Return manifold valve
- 4 Suction manifold valve - main tank / RinseTank
- 5 Filling device
- 6 15 l Clean Water tank
- 7 TurboFiller
- 8 Dry level indicator
- 9 EVC operating unit with pressure relief and constant pressure
- 10 Self-cleaning filter
- 11 RinseTank
- 12 Quick Hitch
- 13 Safety locker



### Quick Hitch

The Quick Hitch (cat.II) is an integrated part of the chassis and ensures easy and safe attachment to the tractor.

To secure the sprayer attachment, the Quick Hitch is locked by safety hooks at the lower attachment points.





## Liquid system

### TurboFiller

The HARDI TurboFiller is developed to handle large quantities of powders and liquids. Its high capacity is a result of high vacuum combined with rotation of the liquid forced by the TurboDeflector placed in the bottom of the hopper. Changing from transport to the 95 cm, high filling position is easily made by means of a spring-loaded bracket with automatic transport lock.

A multifunctional 3-valve operating unit and a cleaning pipe make the chemical filling easy and efficient. The cleaning of containers and the TurboFiller itself is managed by a rotating nozzle.

### Filter system

The Self-Cleaning Filter (optional for BK control unit) is a very important safety feature, which minimises annoying downtime due to nozzle blockage and filter rinsing. A large and colour-coded suction filter is mounted on the main tank upper surface to allow inspection without spillage of spray liquid - even when the tank is full.



### EVC operating unit

The EVC electric controls feature remote-controlled section valves and pressure regulator. The section valves are fitted with a constant pressure device and a pressure drop line. These are features which allow the operator to shut off individual sections and maintain accurate application rates. All vital parts of the EVC control unit are completely sealed off from the liquid.



### RinseTanks

80 l RinseTanks (one or two) are integrated into the sprayer's design to allow safe and efficient cleaning in the field; a very important component of good agricultural practice.



### BoomPrime

Low pressure circulation system allowing the spray liquid to circulate to the nozzles before the actual spraying starts



### HARDI diaphragm pumps – the heart of the sprayer

The MASTER liquid system is driven by the robust grease-lubricated HARDI diaphragm pump. The diaphragms separate the liquid from the vital parts of the pump such as its bearings and crankshaft, ensuring reliable and durable operation.

#### HARDI diaphragm pump features:

- Self-priming
- Able to run dry without damage
- Easy to service without special tools
- Grease-lubricated crankcase
- Chemical-resistant diaphragms and valves



### DilutionKit

DilutionKit gives the possibility to flush and rinse the boom and tank or the boom alone without leaving the driver's seat. All return lines and agitation will be flushed when spraying out the diluted liquid from the main tank.



## Booms

### PRO booms

The PRO boom is designed and manufactured utilising our knowledge and experience as the world's leading sprayer specialist. The boom offers every conceivable facility to meet different spraying requirements.

The PRO VP booms 20 to 28 m have integrated AntiYaw damper on the boom wings.



The lattice boom structure ensures a strong and rigid boom; the basis for exact and uniform spray distribution. The nozzles, spray lines and hoses are all well protected within the boom design.

The PRO boom is durable, and reinforced boom hinges ensure a steady boom in spraying position. A spring-loaded break-away section secures the tip of the boom.



The slim tank design and the compact folded PRO boom ensure optimal weight distribution and tractor stability while spraying and during road transport.



The PRO booms are available in two hydraulic versions:


**Y version:** Operated by tractor hydraulic outlets – one single-acting and one double-acting outlet are required.(12 - 18 m)

**Z version:** Operated by direct hydraulics (DH) – one double-acting outlet is required for 6 different operations, and 1 single-acting outlet for lifting the boom.

The Z version offers several facilities such as reduced folding, single-side folding and individual boom tilt.

## Boom sections

The vertically folded PRO boom has 2, 3, 4 or 5 segments on each boom wing. The drawing illustrates how many nozzles each boom section has, and where the boom is folded.

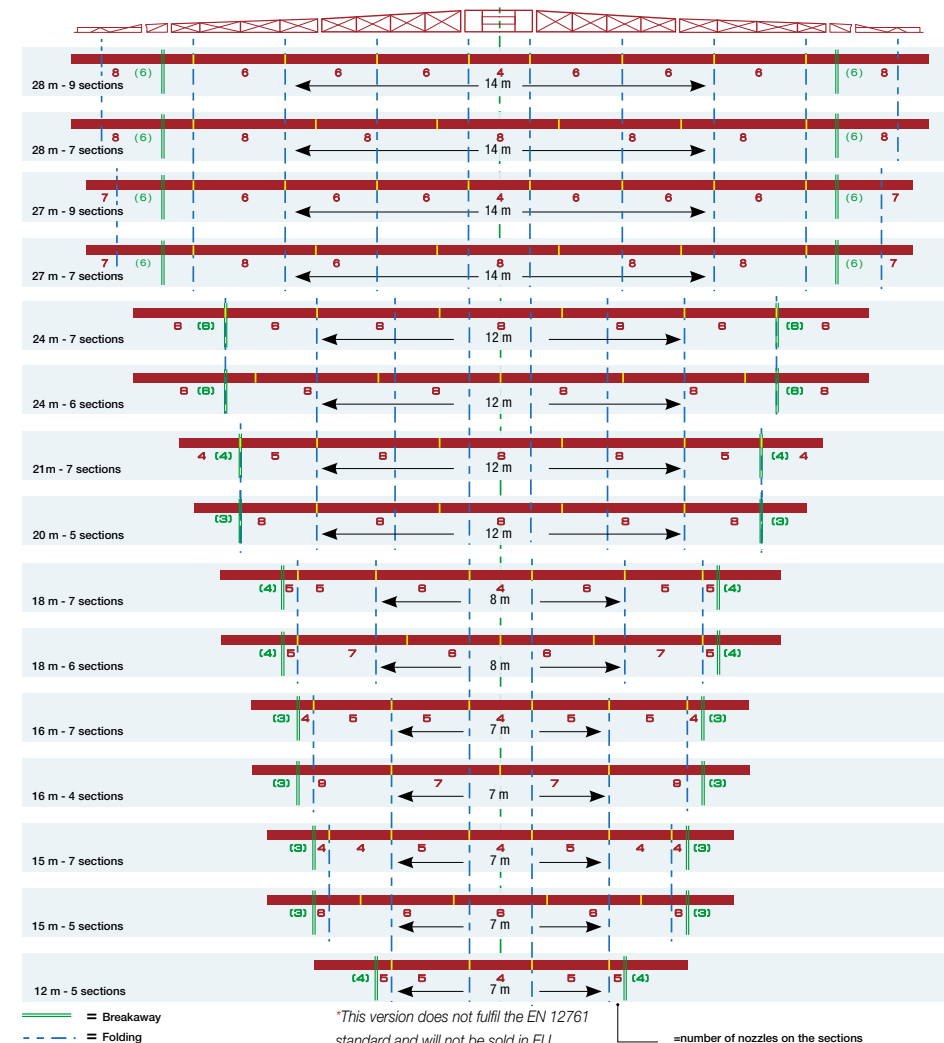

## Booms

### TWIN STREAM

The HARDI TWIN is the most proven spraying system in the world and has shown its reliability. Its unique form of air assistance provides magnificent drift control, the highest fieldwork rate with benefits of notable chemical savings.

### HARDI TWIN user survey results

The work rate of one TWIN sprayer is equivalent to two conventional sprayers.

An average of 16 % pesticide reduction compared to conventional spraying techniques.

**[www.hardi-twin.com](http://www.hardi-twin.com)**

The TWIN STREAM is available in 12 and 15 m spray widths. The angling of the air curtain and nozzles – as well as adjustment of the air speed – are important features for minimising drift and optimising coverage.



### HARDI TWIN – advanced technology

TWIN advantages:

- Application at higher spraying speeds
- More »right time« spraying hours
- Lower application volume rates
- Remarkable drift reduction
- Chemical savings

Angling of the spray ranges from  $\pm 18^\circ$ , and the fan blower provides  $1500 \text{ m}^3/\text{h}/\text{m}$  boom width at speeds up to  $27 \text{ m/s}$ .

All hydraulic functions, including the blower, are driven by the tractor's hydraulic system. Hydraulic boom slanting is optional, requiring one extra double-acting tractor outlet.




## Better penetration and coverage


Grass weed can be difficult to control, especially when using coarse drops.

The movements in the plants caused by the air assistance and the fine droplets secure a high deposit on the grass weed. Higher deposit on the target increases the efficacy, which makes it possible to reduce the chemical rate.

Excellent drift control with TWIN makes it possible to use smaller drops under a greater range of conditions. With TWIN air assistance, lower water volumes will still maintain excellent coverage over all leaf surfaces. Typical broadacre users of TWIN are using 70 to 80 l/ha for all their products whilst high value crops such as vegetables and strawberries are at 150 to 300 l/ha; massive savings in water haulage and time refilling from traditional spraying practices.



Forward angling



No angling



Backward angling

## Front Tank

### HARDI FT 1000 Front Tank

Front Tank is a good solution in order to have extra weight and increase the spray capacity.

On hilly terrain and in slope areas, or on smaller fields, a Front Tank combination is a perfect solution as a good weight distribution and an excellent manoeuvrability are given.

For bigger lift mounted sprayers like the HARDI MASTER 1500 and 1800 l, the tractor sometimes needs an extra front weight.

The HARDI Front Tank can be used in different set-ups. Depending on the demands, it is either a nurse tank to bring more water into the field or a second chemical tank.


The tank is made in high impact polyethylene and has a liquid free level indicator on top of the tank, which can be seen from the driver's seat.

### Agitation kit - Optional

The agitation kit takes care that the spray solution in the Front Tank is mixed well. A 12V driven robust stainless steel centrifugal pump is keeping the mixture homogeneous while the rear tank is emptied.



## At lower water volume - save at least 50% water

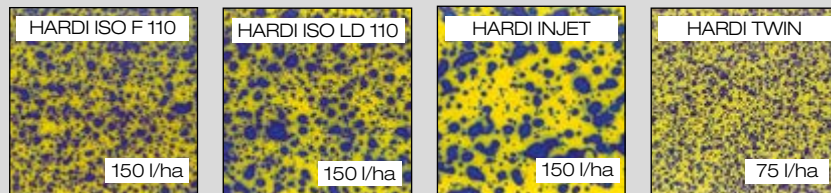

The blue colour shows the coverage on the weed.

## Technical data

| Tank size (net/gross) | Width  | Height | Length | Weight |
|-----------------------|--------|--------|--------|--------|
| 1000 (1190)           | 176 cm | 84 cm  | 148 cm | 137 kg |

The linkage is made for a category 2 front linkage.

The national legislations regarding axle overhang, road safety equipment and front axle load should be considered.

# Controller

## Electronic solutions

MASTER plus can be delivered with 4 different terminals and can also be chosen as an ISOBUS ready sprayer. To make the complex sprayer operation easier, the HC 6500, HC 8500 and HC 9500 have the proven HARDI GRIP for the operation of all primary spray functions, such as ON/OFF and section switches, and the hydraulic operation can easily and safely take place by means of a joystick.

### HC 5500

The HC 5500 is very simple to use. The volume rate is automatically controlled. Pressing the “up” arrow increases the volume rate ... it is easy, quick and simple. The LogicMenu makes it easy to get vital information very quick; when pressing pre-set keys, the information appears in the large-format area of the screen.



### HC 6500

HC 6500 gives you a colour display and joystick operation. Designed specifically for sprayers, the HC 6500 will make the MASTER plus an even more obvious choice.



### HC 8500 and HC 9500

“Touch the future” with integrated electronics. The HC 8500 and HC 9500 controllers provide growers with a powerful, full-featured precision farming tool. AutoSectionControl, guidance and data logging are standard features of the ISOBUS terminals. The complete integration of all important information on one work screen is an important criterion. Farmers want to see all information on the sprayer, guidance and boom management without having to change the work screen.




### SprayRover 570

The SprayRover 570 is a stand-alone AutoSection-Control which can work in combination with the well-known HC 5500 controller. The 5.7” (14.5 cm) colour touchscreen display has a resolution of 320 x 240 pixel. It can be used in 2D or 3D graphic. The SprayRover 570 offers Guidance with five different guidance modes.




## AutoSectionControl

The automatic GPS based positioning system opens and closes boom sections as the sprayer passes over areas already sprayed. Standard on HC 8500 and HC 9500 terminals.



## AutoSlant


Automatic control of boom height and slant functions of the boom. AutoSlant is available for the vertically folded VPZ booms from 20 to 28 m. AutoSlant is integrated in the ISOBUS terminal.





## Technical specifications

| Tank size (net/gross) | 800 (880) | 1000 (1100)     | 1200 (1320)     | 1500 (1600)     | 1800 (1895)     |
|-----------------------|-----------|-----------------|-----------------|-----------------|-----------------|
| Pump 1303 (114 l/min) | ○         | ○               |                 |                 |                 |
| Pump 363 (194 l/min)  | ○         | ○               | ○               | ○               | ○               |
| Pump 463 (276 l/min)  |           |                 |                 | ○               | ○               |
| Weight, kg            |           |                 |                 |                 |                 |
| PRO 12 m - 12.5 m     | 913       | 922             | 955             | 1077            | 1089            |
| PRO 15 m - 16 m       | 970       | 979             | 1012            | 1134            | 1146            |
| PRO 18 m              | 1028      | 1037            | 1070            | 1192            | 1204            |
| PRO 20 m              |           | 1102            | 1135            | 1257            | 1269            |
| PRO 21 m              |           | 1107            | 1140            | 1262            | 1274            |
| PRO 24 m              |           | 1127            | 1160            | 1280            | 1292            |
| PRO 27 m              |           |                 |                 | 1388            | 1400            |
| PRO 28 m              |           |                 |                 | 1402            | 1414            |
| TWIN STREAM 12 m      | 924       | 933             | 966             |                 |                 |
| TWIN STREAM 15 m      | 1013      | 1022            | 1055            |                 |                 |
|                       |           |                 |                 |                 |                 |
| Measurements, cm      | D         | A × B × C       | A × B × C       | A × B × C       | A × B × C       |
| PRO 12 m - 12.5 m     | 225       | 153 × 253 × 271 | 153 × 253 × 271 | 166 × 253 × 271 | 183 × 253 × 271 |
| PRO 15 m - 16 m       | 225       | 153 × 253 × 271 | 153 × 253 × 271 | 166 × 253 × 271 | 183 × 253 × 271 |
| PRO 18 m              | 225       | 153 × 253 × 296 | 153 × 253 × 296 | 166 × 253 × 296 | 183 × 253 × 298 |
| PRO 20 m              | 220       |                 | 174 × 253 × 275 | 187 × 253 × 275 | 204 × 253 × 275 |
| PRO 21 m              | 220       |                 | 174 × 253 × 275 | 187 × 253 × 275 | 204 × 253 × 275 |
| PRO 24 m              | 220       |                 | 174 × 253 × 325 | 187 × 253 × 325 | 204 × 253 × 325 |
| PRO 27 m              | 220       |                 |                 | 204 × 253 × 325 | 204 × 253 × 325 |
| PRO 28 m              | 220       |                 |                 | 204 × 253 × 325 | 204 × 253 × 325 |
| TWIN STREAM 12 m      | 260       | 190 × 260 × 271 | 190 × 260 × 271 | 203 × 260 × 271 |                 |
| TWIN STREAM 15        | 260       | 190 × 260 × 348 | 190 × 260 × 348 | 203 × 260 × 348 |                 |

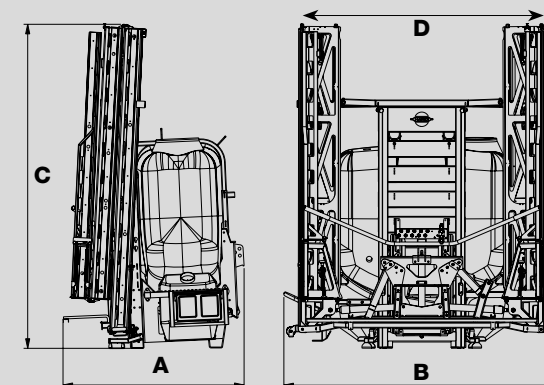

A = Total length in cm

B = Maximum transport width in cm

C = Total height in cm

D = Transport width boom in cm

## Optional



Safety locker



Filling device




Traffic lights




External Cleaning Kit



Maneuvering wheel kit

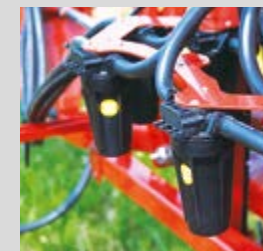

In-Line filters



Hydraulic boom slant



*Høje Taastrup,  
Denmark*

*Nørre Alslev,  
Denmark*

*Savigny,  
France*

*Beaurainville,  
France*

*Davenport,  
USA*


*Lleida,  
Spain*

*Adelaide,  
Australia*

## HARDI - The Sprayer

HARDI INTERNATIONAL A/S is an international group whose basic idea is to satisfy the user's requirements for quality products which ensure efficient, punctual and precise application of crop protection products. Our world-wide distribution and sales network comprise more than 100 countries where we are represented by importers, agents and sales subsidiaries. These are situated in Sweden, Norway, Denmark, the UK, France, Spain, North America, Germany and Australia.

Since 1957 HARDI has committed to the ever-increasing demands for efficient and precise plant protection. HARDI is the trendsetter within application of crop protection products. To achieve this position continued developments and innovation are essential. HARDI is committed to the long term future of plant protection.

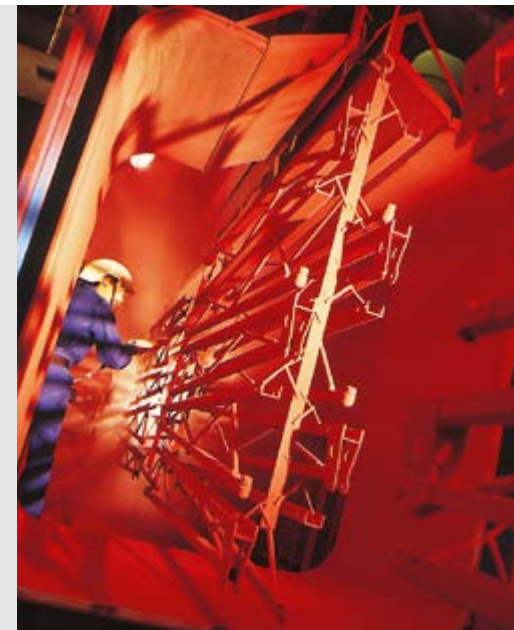

## Superb surface treatment

The high-technology surface treatment contains 13 treatments, including an Oxsilan pre-treatment and powder coat painting of all major components.

Together with the Delta/Magni treatment of nuts, bolts and other items, we supply high corrosion protection of our products. The chassis, the boom and all other steel parts have been pre-treated with Oxsilan followed by a high-quality coating of powder paint.

## HARDI Ltd.

Watling Suite (unit B)  
High Cross Business Park  
Coventry Road • Sharnford  
Leicestershire • LE10 3PG  
Phone: 01 455 22 22 30 • Fax: 01 455 22 22 40  
E-Mail: sales@hardi-uk.com • www.hardi.co.uk

## HARDI INTERNATIONAL A/S

Helgeshøj Allé 38 • DK 2630 • Taastrup • Denmark  
E-Mail: hardi@hardi-international.com • www.hardi-international.com



**The Sprayer**

## Testing procedures

Sprayers leaving HARDI INTERNATIONAL A/S are tested according to the strictest quality standards.

The staff of the assembly line is accredited to match the demands from both NSTS (National Sprayer Testing Scheme), UK and JKI (Julius Kühn Institut), Germany. This ensures that the highest quality sprayers are delivered to farmers.



Read more at [www.hardi-international.com](http://www.hardi-international.com)

*HARDI reserves the right to change the specifications without notice.  
Illustrations shown may include optional extras and accessories.*

